Push Button Series

SOYAL®

AR-PB2

Full Stainless Steel Push Button



Available with Logo Customization

Button Type



(LED ON:Green&Red)

Features

- Flush mounted design is thin and aesthetics, full stainless steel material make it durable.
- Three types for installation on various sites: Slim type, US type and EU type.
- Weather resistance design for indoor and outdoor use.
- Welcome customized logo with laser engraving on the panel to enhance the overall image quality of the building or community.
- Conventional switch no power needed, easy installation and long life span.

Specification

Voltage	None / DC 12V (LED)
Current	LED : 12VDC / 10mA
Contact capacity	30VDC / 100mA
Output Contact	N.O. / N.C.

Slim US Type




Model No.	AR-PB2-041108
Dimmension	108(H)X41(W)X4/15(D)
Print Text	SOYAL with Door Exit logo

Rectangle US Type



Model No.	AR-PB2-072122
Dimmension	122(H)X72(W)X4/15(D)
Print Text	SOYAL with Door Exit logo

Square EU Type

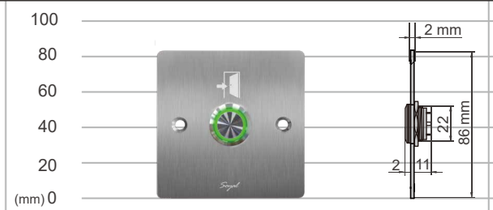

Model No.	AR-PB2-068108
Dimmension	86(H)X86(W)X4/15(D)
Print Text	SOYAL with Door Exit logo

AR-PB5

Stainless Steel Push Button (No Power Supply Needed)



Available with Logo Customization


Features

- Flush mounted design is thin and aesthetics, full stainless steel material make it durable.
- Three types for installation on various sites: Slim type, US type and EU type.
- Built-in multiple sets of membrane switches, can be triggered by pressing the button at any angle, with a life time of more than 500,000 times.
- Welcome customized logo with laser engraving on the panel to enhance the overall image quality of the building or community.
- No need external power supply, easy to use.

Specification


Voltage	None
Current	-
Contact capacity	30VDC / 100mA
Output Contact	N.O.

Slim US Type




Model No.	AR-PB5-041108
Dimmension	108(H)X41(W)X2/13(D)
Print Text	SOYAL+EXIT

Rectangle US Type



Model No.	AR-PB5-072122
Dimmension	122(H)X72(W)X2/13(D)
Print Text	SOYAL+EXIT

Square EU Type



Model No.	AR-PB5-086086
Dimmension	86(H)X86(W)X2/13(D)
Print Text	SOYAL+EXIT

AR-101-PBI-S

Touch-less Infrared Sensor Push Button

Standard



(LED OFF) (LED ON:Green&Red)

Made by Order



(LED OFF) (LED ON:Green&Red)


Features

- Flush mounted design is thin and aesthetics, Bi-cloro LED ring shine and light your life.
- Infrared sensor design can trigger door lock without touching, suited in fields with high hygienic standards.
- Three types for installation on various sites: Slim type, US type and EU type.
- Modular design offer the flexibility to install it on the decoration surface on site rather than matching it with standard panels only.
- The physical contact feature allows door open under no power supply situation just by pressing the button.

Specification


Voltage	DC 12-24V
Current	DC 12V Standby: 35mA / Max. during activation: 65mA
Contact capacity	30VDC 1A / 125VAC 0.3A
Output Contact	1 Form C (1A / VAC/VDC 30V)

Slim US Type

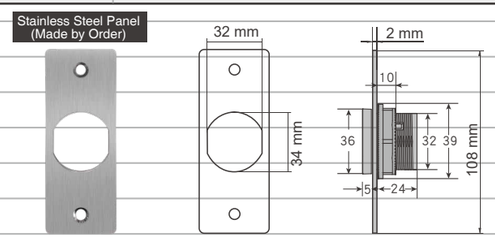


Model No.	DMET-101PJ01
Dimmension	108(H)X41(W)X2/31(D)
Print Text	N/A

Rectangle US Type

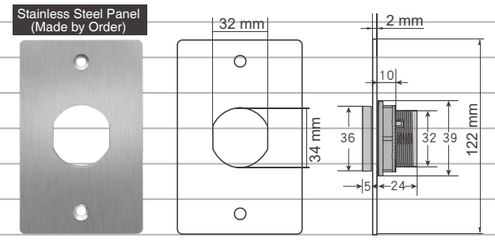

Model No.	DMET-101PJ05
Dimmension	122(H)X72(W)X2/31(D)
Print Text	N/A

Square EU Type

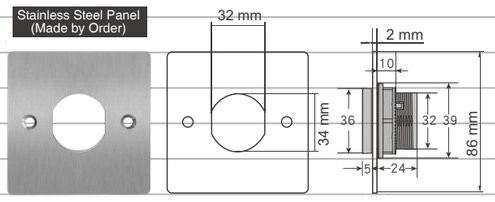

Model No.	DMET-101PJ03
Dimmension	86(H)X86(W)X2/31(D)
Print Text	N/A

AR-101-PBI-L

Touch-less Infrared Sensor Push Button

Standard



(LED OFF) (LED ON:Green&Red)

Made by Order



(LED OFF) (LED ON:Green&Red)


Features

- Infrared sensor design can trigger door lock without touching, suited in fields with high hygienic standards.
- Three types for installation on various sites: Slim type, US type and EU type.
- Modular design offer the flexibility to install it on the decoration surface on site rather than matching it with standard panels only.
- The physical contact feature allows door open under no power supply situation just by pressing the button.
- The new button we designed is suitable for installation as both door exit button and also lift floor button.
- The sensing distance can be adjusted from 1cm to 6cm (With Additional Physical Button).

Specification


Voltage	DC 12-24V
Current	DC 12V Standby: 30mA / Max. during activation: 75mA
Contact capacity	30VDC 1A / 125VAC 0.3A
Output Contact	1 Form C (1A / VAC/VDC 30V)

Slim US Type

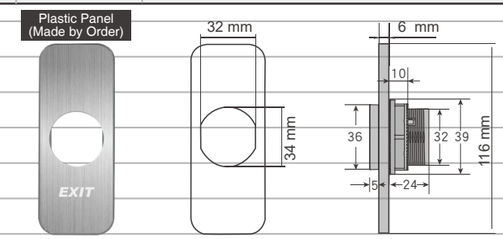


Model No.	DPLA-101PB-L-6A
Dimmension	116(H)X46(W)X6(D)
Print Text	Exit logo

Rectangle US Type

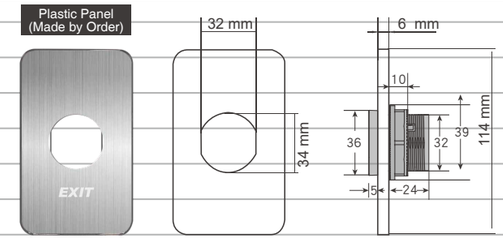

Model No.	DPLA-101PB-L-7A
Dimmension	114(H)X69(W)X6(D)
Print Text	Exit logo

Square EU Type

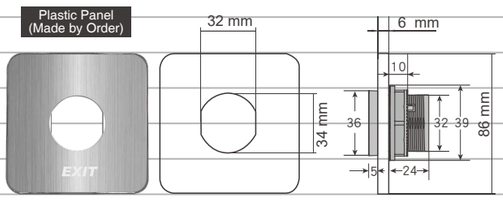

Model No.	DPLA-101PB-L-8A
Dimmension	86(H)X86(W)X6(D)
Print Text	Exit logo

AR-888-PBI-S

Flush Mounted IR Push Button

(Active distance: 4-stage adjustment within 2~10cm)



Standby signal: central guiding LED status



Door open LED status: adjustable red/green LED frame

Features

- Flush mounted design is thin and aesthetics, Bi-color LED ring shine and light your life.
- Infrared sensor design can trigger door lock without touching, suited in fields with high hygienic standards.
- US type and EU type for choice and installation on various sites.
- LED ring color is changeable according to user needs.
- Anti-sunlight and infrared interference design
- Waterproof rating IP65, suitable for indoor and outdoor installation.
- The infrared reading range is adjustable according to the needs.


Specification

Voltage	DC 12-24V
Current	DC 12V Standby: 35mA / Max. during activation: 65mA
Contact capacity	30VDC 1A / 125VAC 0.3A
Output Contact	Relay(Form C)

Slim US Type


Model No.	—
Dimmension	—
Print Text	—

Rectangle US Type

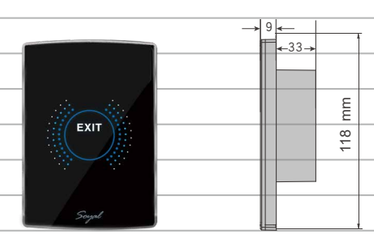

Model No.	AR-PBI-888(US)
Dimmension	118(H)X81(W)X9/42(D)
Print Text	SOYAL+EXIT

Square EU Type

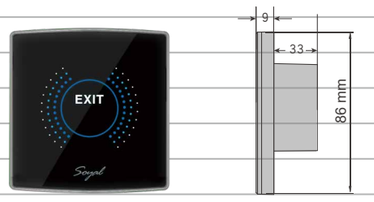

Model No.	AR-PBI-888(EU)
Dimmension	86(H)X86(W)X9/42(D)
Print Text	SOYAL+EXIT